



CFR Serie Safe



Model CFR-2, with internal cupboard (option)



Model CFR-2 with slot
- Slot dimensions (mm):
20 (height) x 130 (width)
- Anti-fish device



This new serie of safes, with an innovating design and which features regarding weight and functionality have been studied on the basis of the market requirements, is ideal to be installed in homes, retail outlets and professional offices.

The Spanish Association for Standarization and Certification (AENOR) certifies that the quality management system adopted by Ferrimax, s.a. for the design, the manufacturing, the commercialisation, the after sales service and maintenance of safes and physical security products, complies with the requirements of the Standard EN ISO 9001:2000.



CFR Serie Safes

CARACTERISTIQUES DE FABRICATION

Body

Has a total thickness of 65 mm and is built with an outside and an inside lining in steel plate combined with high performing sinter and fibres inside. This provides a high resistance against mechanical attacks.

Door

Total thickness 85 mm, including locking system. Armour thickness: 12 mm.

Locking devices

Are distributed all over the door surface and they function individually means of strong cylindrical bolts of 30 mm diameter.


- High security key-lock driven by double bitted key
- electronic combination lock (Class I VdS, with which a million different combinations can be created)

Key-locked cupboard

Optionally, CFR Serie safes can be equipped with a key-locked cupboard (from CFR-2).

Floor anchoring

The safes of the CFR Series are prepared to be fixed to the floor.

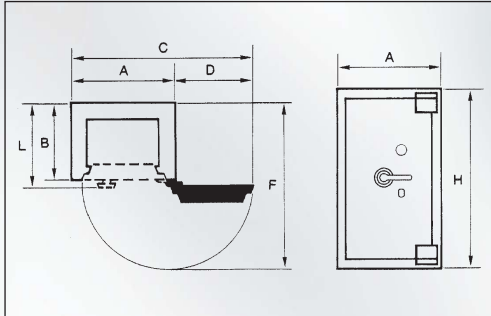

Dimensions

Model	External dimensions (mm)			Internal dimensions (mm)			Occupation size (mm)				Shelves	Horiz. bolts Ø 30	Vert. bolts Ø 30	Volume (litres)	Weight (kg)
	H-Height	A-Width	B-Depth	Height	Width	Depth	C	D	F	L					
CFR-1	400	500	475	270	370	320	900	400	925	525	1	2	2	32	170
CFR-2	600	500	475	470	370	320	900	400	925	525	1	2	2	56	205
CFR-2 with slot	600	500	475	470	370	320	900	400	925	525	-	2	2	56	205
CFR-3	750	500	475	620	370	320	900	400	925	525	1	2	2	73	260
CFR-4	980	630	575	850	500	420	1160	530	1155	625	2	4	2	179	400
CFR-5	1200	630	575	1070	500	420	1160	530	1155	625	2	4	2	225	450

Slot: 20 x 130 mm.

CFR Series Safes range



Distributed by



www.ferrimax.com

MANUFACTURING PLANT IN BARCELONA

Tel +34 93 460 16 96

comercial@ferrimax.es · export@ferrimax.com

BRANCH OFFICE IN MADRID

Tel +34 91 796 08 96 · madrid@ferrimax.es