

400 Dinami Light Series Safes

Grade I · Standard EN 1143-1



Model Dinami 412

History

Ferrimax, is a leading Spanish company producing security products to the highest safety standards. With more than 30 years experience in the security sector and many blue chip customers, Banks, Jewellers, Retailers and service stations all look to Ferrimax for top quality products.

New series

In Greek Dinami means resistance or stamina - a fitting name for this new product range developed by Ferrimax to resist the sophisticated new methods of attack used by today's criminals.

Quality

All Ferrimax's manufacturing processes conform to ISO 9001:2000.

Sustainable

The whole manufacturing cycle from the raw materials to the final packaging are geared towards the production of the environment.




Option: combination lock



400 Dinami Light Series Safes

Grade I · Standard EN 1143-1

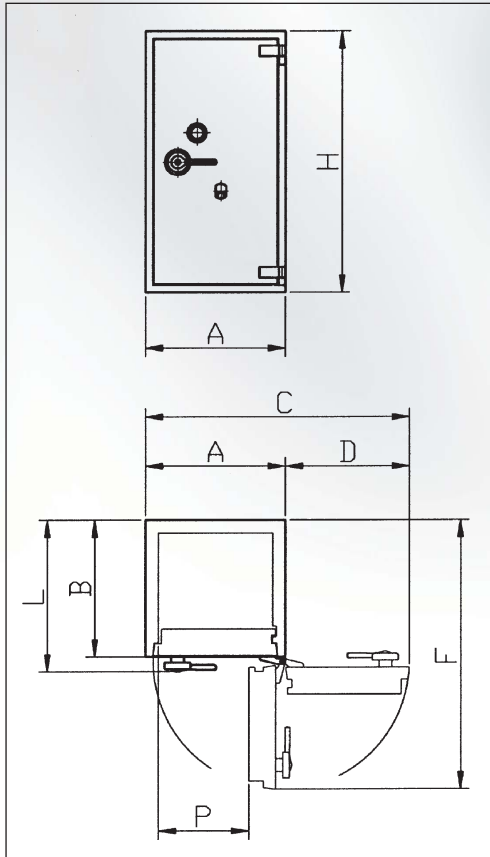

Tested and certified

The 400 Dinami Light Series has been designed and manufactured to the European testing standards for safes UNE 1143-1. All tests were undertaken by the German Laboratory VdS and the French Laboratory C.N.P.P. The process has been certified by VdS and a2p.

Technical features

A new generation of composite materials based on "DSP" (Densified System Particules) has reduced the weight by approximately 40% but still conforms to the required security grade standard EN 1143-1. The wallthickness is 40 mm. The door thickness, including the chamber, is 120 mm. All the safes are finished in Ferrimax grey - RAL 7040.

Protection

The sensitive locking zones, the bolts, relocking system and main key lock have anti drilling protection fitted as standard. To resist attack to the hinges a full door height rebate rail is fitted whilst the leading edge of the doors are secured by multiple 30 mm diameter bolts*.

Locks and re-locking systems

One double-bit key lock certified, and delivered with 2 keys.

Options

As an option, 400 Dinami Light Series safes can be provided with:

- an internal cupboard with key
- a mechanical combination lock
- a electronic combination lock

Ferrimax can also include other options to match individual clients requirements.



Dimensions

* Varies according to model

Model	External dimensions (mm)			Internal dimensions (mm)			Occupation sizes (mm)					Shelves	Bolts horizont. Ø 30	Bolts vertical Ø 30	Volume (litres)	Weight (Kg)
	H-height	A-width	B-depth	height	width	depth	C	D	F	L	P					
402	440	550	395	360	470	235	1028	478	913	450	270	1	2	2	40	76
410	580	550	500	500	470	340	1028	478	1018	555	270	1	2	2	80	110
412	830	550	500	750	470	340	1028	478	1018	555	270	2	4	2	120	290
416	830	610	610	750	530	450	1148	538	1188	665	380	2	4	2	179	355
418	1180	610	610	1100	530	450	1148	538	1188	665	380	3	4	2	262	478
425	1180	730	610	1100	650	450	1388	658	1308	605	500	3	4	2	320	530
450	1700	730	610	1620	650	450	1388	658	1308	665	500	4	6	2	500	725

Distributed by



www.ferrimax.com

MANUFACTURING PLANT IN BARCELONA

Tel +34 93 460 16 96

comercial@ferrimax.es · export@ferrimax.com

BRANCH OFFICE IN MADRID

Tel +34 91 796 08 96 · madrid@ferrimax.es